



Customer	_____	Installed	_____
Address	_____	APR invoice	_____
Model	_____	Serial no.	_____


How it works

The Naked Freshwater System replaces a standard salt or chlorine system. A digital control unit runs two parts together. The **ION** cell releases small amounts of copper and silver: silver helps control bacteria and copper helps stop algae. The **OXI** cell oxidises the water over titanium plates, producing a very small amount of chlorine to break down sweat, sunscreen and leaves. The result is water with far less chlorine than a standard pool.



Far less chlorine


Naked Pools recommends free chlorine of just 0 to 0.5 ppm, compared with typical chlorine, salt and mineral pools, and below the typical level in treated drinking water.

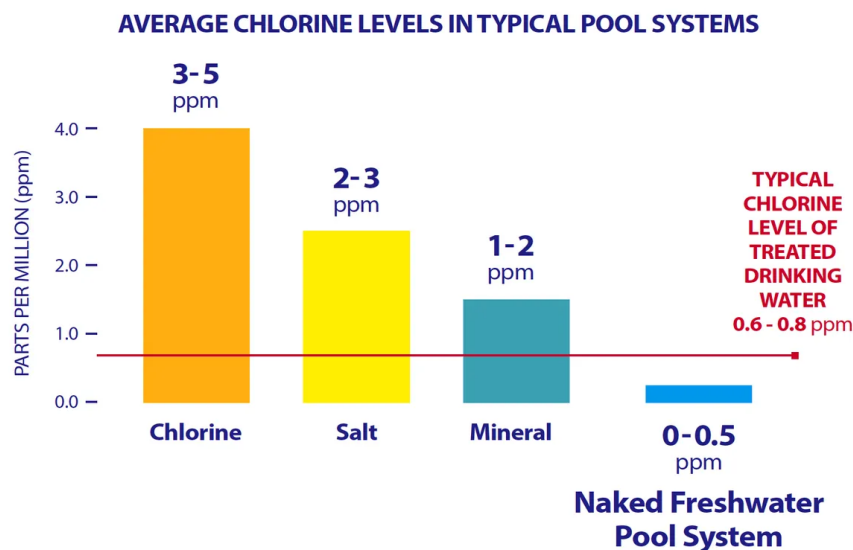

What Naked Pools says it offers

- Much lower chlorine levels than a standard pool.
- Gentler on eyes and skin.
- Lower running and chemical costs.
- Less salt in the water.
- No need to rinse swimwear after swimming.

These are the manufacturer's claims. Results depend on your pool, its equipment and how the water is looked after.

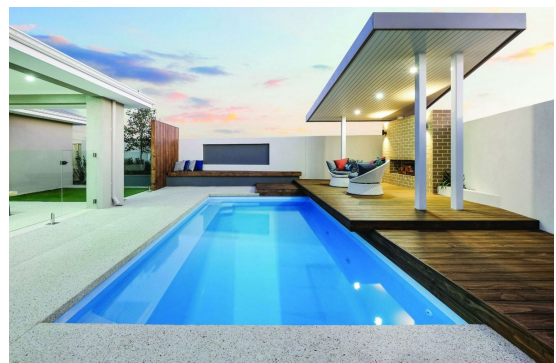

Images and chart: Naked Pools.

Protect your pool surface: keep the water in balance

Copper keeps algae away, but **too much copper can stain fibreglass and gelcoat surfaces**. These are the ranges Naked Pools recommends for **fibreglass** pools. Always test copper with the Naked copper test kit.

pH	7.2 to 7.4	Copper	0.2 to 0.5 ppm
Free chlorine	0 to 0.5 ppm	Total alkalinity	80 to 120 ppm
Calcium hardness	150 to 190 ppm	Salt / mineral salt	500 to 700 ppm
TDS	800 to 1200 ppm	Phosphates	0 to 0.2 ppm

Testing

- pH weekly. Copper weekly to fortnightly, especially in summer.
- New surface: pH often runs high for the first 10 to 12 weeks.
- Alkalinity and phosphates: every 4 to 6 weeks.
- Pool shop test every couple of months (say it is a freshwater pool).
- Check pH first. High pH hides a true copper reading.

Never use

- Copper-based algaecides.
- Stabiliser (cyanuric acid), bromine, granular chlorine or soda ash.
- Aluminium-based flocculants or zeolite filter media.
- Acid washing or abrasive cleaning on a fibreglass surface.

- Wipe the waterline regularly to stop sunscreen and oil marks building up.
- Clean the OXI cell and replace the ioniser rods as the Naked manual describes (rods typically last about 3 years).

Warranty: who covers what

Naked Pools (the equipment)

- Digital power pack and OXI electrode: 36 months from purchase, back to base.
- Ioniser rods are a consumable and are not covered.
- Voided by incorrect installation, unauthorised servicing, water in the power pack or TDS above 3000 ppm.
- Register your system with Naked Pools and keep your APR invoice.

Australian Pool Resurfacing (your surface)

- Our resurfacing warranty covers our workmanship and materials.
- It does **not** cover staining or discolouration caused by copper, other metals or water chemistry.
- Black spot is a water care condition and is not covered.
- Keeping your water in range protects your surface and your warranty.

Who to call

Naked Pools (system and warranty)

1800 625 331

naked-pools.com | sales@naked-pools.com

Australian Pool Resurfacing

03 5975 5955

info@fixmypool.com.au. Call us any time about your pool surface.

This summary is provided by Australian Pool Resurfacing for convenience, based on the Naked Pools user manual and handover tips. The Naked Pools manual and warranty apply if there is any difference. Your guarantees under the Australian Consumer Law cannot be excluded and apply in addition to any warranty.

Australian Pool Resurfacing Pty Ltd | Unit 16, 33 Milgate Drive, Mornington VIC 3931 | australianpoolresurfacing.com.au | SPASA Member